



HV-LPF

High Voltage Low Pass Filter





HIGHLIGHTS

The HV-LPF is used to reduce the eventual noise, generated by the HV power supply. Its small dimensions allow for it to be connected as close as possible to the load.

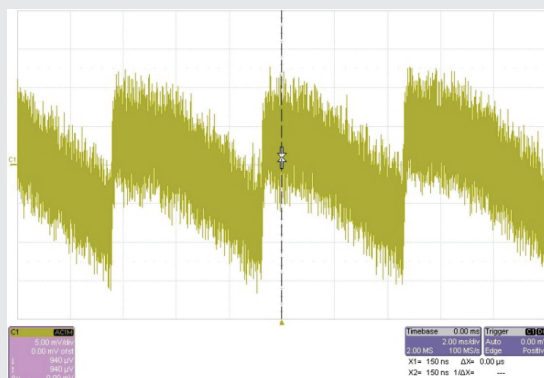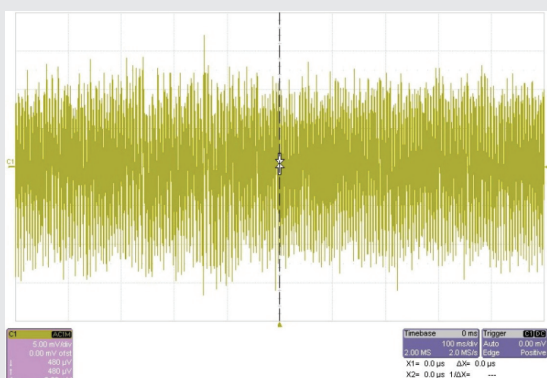

Signal of the High Voltage Power Supply without filter

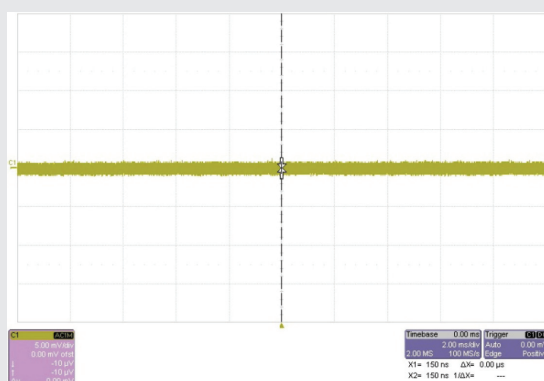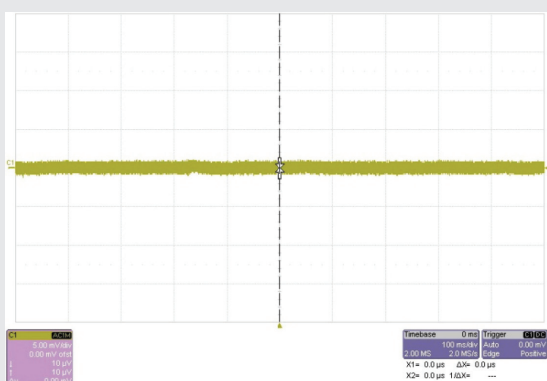

Signal of the High Voltage Power Supply filtered by HV-LPV

SPECIFICATIONS

In / Out Connector	SHV Jack / Plug
Fc – 3 dB	8.8 Hz
Max Input Voltage	3 kV DC
Max Input Current	1 mA @3KV
Resistance	3 MΩ
Weight	162g
Dimension	115 x 34 x 24 mm
Total Dimension	160 x 34 x 24 mm

HV-LPF BLOCK DIAGRAM



Contact us!

Industrial Liaison Office

Elettra - Sincrotrone Trieste S.C.p.A.
S.S. 14 - km. 163.5 in Area Science Park, 34149 Basovizza - Trieste, Italy
Tel. +39 040 3758303 - Fax +39 040 3758623
ilo@elettra.eu - <http://ilo.elettra.eu>



Elettra Sincrotrone Trieste